

JOINT SETS & GASKETS

Flange to Flange

Used for joining two standard pipes together. Pack comes with bolts, nuts, washers and gasket.

Code	Size	Bolts	Nuts	Washers	Ring
JSFF15	15mm	4	4	4	1
JSFF20	20mm	4	4	4	1
JSFF25	25mm	4	4	4	1
JSFF32	32mm	4	4	4	1
JSFF40	40mm	4	4	4	1
JSFF50	50mm	4	4	4	1
JSFF65	65mm	4	4	4	1
JSFF80	80mm	8	8	8	1
JSFF100	100mm	8	8	8	1
JSFF125	125mm	8	8	8	1
JSFF150	150mm	8	8	8	1
JSFF200	200mm	12	12	12	1
JSFF250	250mm	12	12	12	1
JSFF300	300mm	12	12	12	1

Flange to Valve

Used for joining pipe to a valve. Pack comes with bolts, nuts, washer and gasket.

Code	Size	Bolts	Nuts	Washers	Ring
JSFV15	15mm	4	4	4	1
JSFV20	20mm	4	4	4	1
JSFV25	25mm	4	4	4	1
JSFV32	32mm	4	4	4	1
JSFV40	40mm	4	4	4	1
JSFV50	50mm	4	4	4	1
JSFV65	65mm	4	4	4	1
JSFV80	80mm	8	8	8	1
JSFV100	100mm	8	8	8	1
JSFV125	125mm	8	8	8	1
JSFV150	150mm	8	8	8	1
JSFV200	200mm	12	12	12	1
JSFV250	250mm	12	12	12	1
JSFV300	300mm	12	12	12	1

Flange to Flex

Used for joining pipe to an expansion bellow. Pack comes with bolts, nuts and washers; no gaskets.

Code	Size	Bolts	Nuts	Washers	Ring
JSFX15	15mm	4	4	4	0
JSFX20	20mm	4	4	4	0
JSFX25	25mm	4	4	4	0
JSFX32	32mm	4	4	4	0
JSFX40	40mm	4	4	4	0
JSFX50	50mm	4	4	4	0
JSFX65	65mm	4	4	4	0
JSFX80	80mm	8	8	8	0
JSFX100	100mm	8	8	8	0
JSFX125	125mm	8	8	8	0
JSFX150	150mm	8	8	8	0
JSFX200	200mm	12	12	12	0
JSFX250	250mm	12	12	12	0
JSFX300	300mm	12	12	12	0

Flange to Metering Station

Used for joining pipe to a metering station. Pack comes with bolts, nuts, washers and two gaskets.

Code	Size	Bolts	Nuts	Washers	Ring
JSMS50	50mm	4	4	4	2
JSMS65	65mm	4	4	4	2
JSMS80	80mm	8	8	8	2
JSMS100	100mm	8	8	8	2
JSMS125	125mm	8	8	8	2
JSMS150	150mm	8	8	8	2
JSMS200	200mm	12	12	12	2
JSMS250	250mm	12	12	12	2
JSMS300	300mm	12	12	12	2

Flange to Fully Lugged

Used for joining pipe to a butterfly valve. Comes with bolts and washers; no gaskets.

Code	Size	Bolts	Nuts	Washers	Ring
JSFL65	65mm	4	0	4	0
JSFL80	80mm	8	0	8	0
JSFL100	100mm	8	0	8	0
JSFL125	125mm	8	0	8	0
JSFL150	150mm	8	0	8	0
JSFL200	200mm	12	0	12	0
JSFL250	250mm	12	0	12	0
JSFL300	300mm	12	0	12	0

Unlugged Valve

Used for joining pipe to an unlugged valve. Pack comes with bolts, nuts and washers; no gaskets.

Code	Size	Bolts	Nuts	Washers	Ring
JSUL65	65mm	4	4	4	0
JSUL80	80mm	8	8	8	0
JSUL100	100mm	8	8	8	0
JSUL125	125mm	8	8	8	0
JSUL150	150mm	8	8	8	0
JSUL200	200mm	12	12	12	0
JSUL250	250mm	12	12	12	0
JSUL300	300mm	12	12	12	0



All bolts, nuts and washers in our joint packs are bright zinc plated. Bolts are 8.8 tensile strength, washers form A and nuts DIN 934. Standard gaskets supplied are IBC, Grade X, Pn16 pressure rated.

Blanking Spade


Used during shutdowns to confirm shut offs, allowing for maintenance of pipework.



Code	Size	Pressure Rating (Pn)
BS076/16	65mm	16
BS089/16	80mm	16
BS114/16	100mm	16
BS140/16	125mm	16
BS168/16	150mm	16
BS219/16	200mm	16
BS273/16	250mm	16
BS323/16	300mm	16

I.B.C. Gaskets

Pn16 Rating		Pn6 Rating	
Code	Size	Code	Size
JR15IBCPN16	15mm	JR32IBCPN6	32mm
JR25IBCPN16	25mm	JR40IBCPN6	40mm
JR32IBCPN16	32mm	JR50IBCPN6	50mm
JR40IBCPN16	40mm	JR65IBCPN6	65mm
JR50IBCPN16	50mm	JR80IBCPN6	80mm
JR65IBCPN16	65mm	JR100IBCPN6	100mm
JR80IBCPN16	80mm	JR125IBCPN6	125mm
JR100IBCPN16	100mm	JR150IBCPN6	150mm
JR125IBCPN16	125mm	JR200IBCPN6	200mm
JR150IBCPN16	150mm	JR250IBCPN6	250mm
JR200IBCPN16	200mm	JR300IBCPN6	300mm
JR250IBCPN16	250mm	JR350IBCPN6	350mm
JR300IBCPN16	300mm	JR400IBCPN6	400mm
JR350IBCPN16	350mm	JR450IBCPN6	450mm
JR400IBCPN16	400mm	JR500IBCPN6	500mm
JR450IBCPN16	450mm		
JR500IBCPN16	500mm		

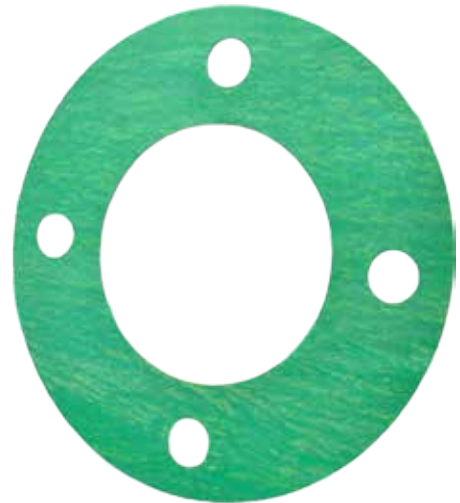

Technical Specifications

Thickness		1.5mm
Density		1.75g/cc
Tensile Strength	ASTM F152	9-11 MPa
Compression	ASTM F36	9%
Recovery	ASTM F36	55% min
Residual Stress	BS 7531 (300°C) DIN 52913	26 MPa 32 MPa
Gas Leakage	BS 7531	<1.0cc/min
ASTM Oil 1	Thickness Increase	1.0%
IRM 903 Oil	Thickness Increase	2.5%
ASTM Fuel B	Thickness Increase	3.0%

Page Pipeline are also able to supply gaskets with pressure ratings of Pn25 and Pn40, as well as in a variety of materials ranging from; neoprene, reinforced graphite, carbon filled PTFE, silicone, nitrile and EPDM.